

## 35W LED COB

### LED-DL635

Cutout:  $\Phi$ 170- 180mm

Cover:  $\Phi$ 195mm x H88mm

## 50W LED COB

### LED-DL850

Cutout:  $\Phi$ 200 - 210mm

Cover:  $\Phi$ 225mm x H100mm

#### Features:

- CREE LED COB & MEANWELL external driver
- Unique patented reflector & lens
- Pure aluminum housing
- Flex'&plug included
- Lifespan: >50,000 hours
- 3 years replacement warranty
- Non dimmable
- 240V 50/60HZ
- Operating temperature: -20~ + 45°C
- Power factor: 0.9
- (Optional: silver frame; dimmable)



Model	Power	Colour Temperature	Lumen	CRI	Efficiency	Current
LED-DL850-WHDL	50W	5000K	4000 lm $\pm$ 10%	>80	80 lm/w	1050mA
LED-DL850-WHCW		4000K	3800 lm $\pm$ 10%	>80	76 lm/w	1050mA
LED-DL850-WHWW		3000K	3500 lm $\pm$ 10%	>83	70 lm/w	1050mA
LED-DL635-WHDL	35W	5000K	3200 lm $\pm$ 10%	>80	86 lm/w	700mA
LED-DL635-WHCW		4000K	2800 lm $\pm$ 10%	>80	80 lm/w	700mA
LED-DL635-WHWW		3000K	2500 lm $\pm$ 10%	>83	72 lm/w	700mA



8" LED DOWNLIGHT 40W

LED-DL8040WH

LED driver included

Cutout size: Φ210mm

Cover: Φ245mm x H66mm (3 clips)

MODEL	COLOUR TEMPERATURE	LUMEN OUTPUT	POWER	CRI	POWER FACTOR
LED-DL6022WH-WW	Warm White (3000K)	1700lm	22W	82	≥0.9
LED-DL6022WH-DL	Daylight (6000K)	2200lm	22W	80	≥0.9
LED-DL8040WH-WW	Warm White (3000K)	3100lm	40W	82	≥0.9
LED-DL8040WH-DL	Daylight (6000K)	4200lm	40W	80	≥0.9

6" LED DOWNLIGHT 22W

LED-DL6022WH

LED driver included

Cutout size: Φ160mm

Cover: Φ195mm x H63mm (2 clips)



Features

- ◆ Input voltage: AC240V 50/60HZ
- ◆ 1.2m flex&plug included for easy installation
- ◆ Frost glass diffuser
- ◆ Not dimmable
- ◆ IP20 / indoor use only



White  
Cover

22W  
40W

3000K  
6000K

IP20



## 120W LED High Bay

### LUM-HB-120

Power

**120W**

Luminous Flux

**13500lm**

## 150W LED High Bay

### LUM-HB-150

Power

**150W**

Luminous Flux

**17000lm**

## 180W LED High Bay


### LUM-HB-180

Power

**180W**

Luminous Flux

**19500lm**

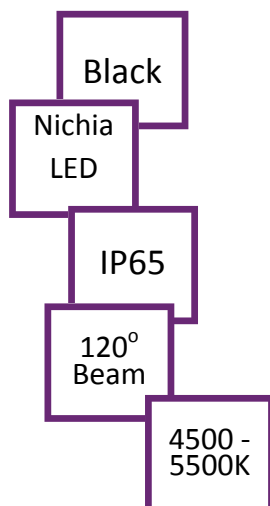

Dimension

$\phi 360\text{mm} \times \text{H}229.5\text{mm}$



### Specifications

Input: **AC100-277V**

**50/60Hz**

Beam angle **120°**

Working Temperature: **-40°C ~+40°C**


IP rated: **IP65**

Lifetime: **≥50000Hrs**

**Non dimmable**

Colour temperature: **4500K - 5500K**

### Features

- ◆ Nichia SMD LED 
- ◆ High Reflective Reflector
- ◆ Fitting: Black
- ◆ Replaceable Driver
- ◆ Die-casting Heat Sink
- ◆ 5 Years replacement warranty





40W LED SHOPLIGHTER

**LED-SF3040**

LED driver included

Cutout size: 130 x 230mm



## FEATURES

System power **40W**

Input voltage: **AC240V 50/60HZ**

Frame colour: **White**

LED colour: **3000K, 4000K, 6000K**

**Frost glass** diffuser

Wide LED beam angle **100°**

Tilting up to **90°**

IP rating: **IP20**

Fire risk free


Not dimmable

White  
Fitting

40W  
LED

Tilt  
90°

100°  
Beam  
angle

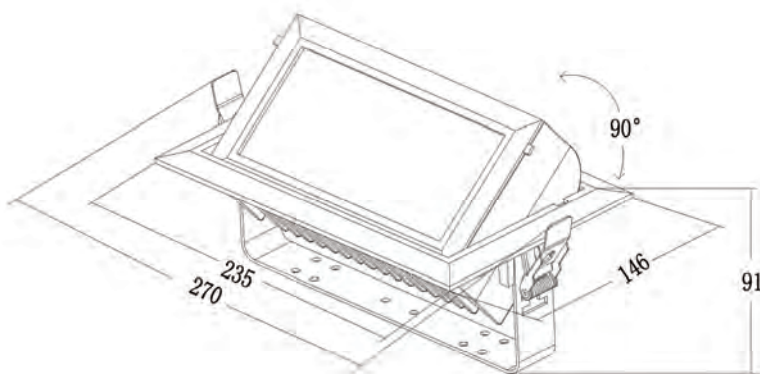

COLOUR TEMPERATURE	LUMEN OUTPUT	CRI	POWER FACTOR
Warm White (3000K)	2800lm	81	≥0.9
Cool White (4000K)	3100lm	80	≥0.9
Daylight (6000K)	3300lm	80	≥0.9

## **Features**

- ◆ Opal acrylic diffuser
- ◆ Input voltage: **AC240V 50/60HZ;**
- ◆ Easy twist on
- ◆ **IP 20** / indoor use only
- ◆ Fire risk free
- ◆ Not dimmable

**Warm  
White**

**Cool  
White**

**Day-  
light**



18W LED OYSTER

**LED-OY18W**

**Φ320mm Acrylic Diffuser**

### **Colour Temperature**

3000K (Warm White)

4000K (Cool White)

6000K (Daylight)

### **Lumen Output**

1300lm / 1450lm / 1500lm

**CRI: 80 - 84**

**Power Factor: ≥0.9**

30W LED OYSTER

**LED-OY30W**

**Φ370mm Acrylic Diffuser**

### **Colour Temperature**

3000K (Warm White)

4000K (Cool White)



6000K (Daylight)

### **Lumen Output**

2000lm / 2300lm / 2400lm

**CRI: 80 - 84**

**Power Factor: ≥0.9**

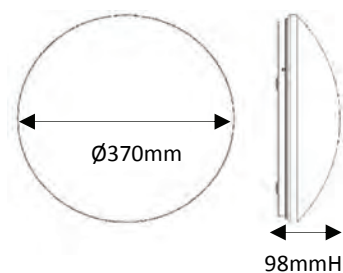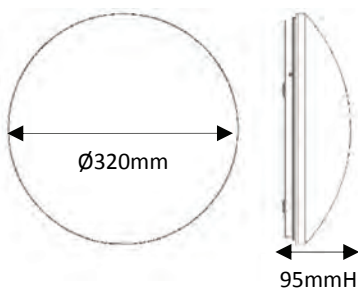



Featuring:

- ◆ Energy saving (≥80%) and long lifespan (≥20000hrs)
- ◆ No mercury or other toxic material
- ◆ No UV or infrared radiation
- ◆ Less heat; easy installation
- ◆ Full brightness at switch-on



**AKESI R63**

120°  
Beam  
Angle

E27

3000K  
6000K

Frost  
Diffuser



**7W LED Frost Lamp**

- ◆ Frost Diffuser
- ◆ E27
- ◆ CRI: ≥80
- ◆ Luminous flux :  
620lm (Daylight)  
520lm (Warm white)
- ◆ Dimensions: 63mm x 95mm
- ◆ Non dimmable
- ◆ 100pcs/CTN

**AKESI R80**

120°  
Beam  
Angle

E27

3000K  
6000K

Frost  
Diffuser



**9W LED Frost Lamp**

- ◆ Frost Diffuser
- ◆ E27
- ◆ CRI: ≥80
- ◆ Luminous flux :  
800lm (Daylight)  
650lm (Warm white)
- ◆ Dimensions: 80mm x 115mm
- ◆ Non dimmable
- ◆ 80pcs/CTN

## Featuring:

- ◆ Energy saving (≥80%) and long lifespan (≥40000hrs)
- ◆ No mercury or other toxic material
- ◆ No UV or infrared radiation
- ◆ Less heat; easy installation
- ◆ Full brightness at switch-on

**AKESI GU10/COB-5W**45°  
Beam  
Angle

GU10

3000K  
6000KClear  
Lens**GU10/5W LED Spotlight**

- ◆ Clear Lens
- ◆ GU10 Base
- ◆ Warm white or daylight
- ◆ CRI: ≥80Ra
- ◆ Luminous flux :  
400lm (Daylight)  
350lm (Warm white)
- ◆ Dimensions: 50mm x 60mm
- ◆ Non dimmable

**AKESI GU10/COB-9W**60°  
Beam  
Angle

GU10

3000K  
6000KClear  
Lens**GU10/9W LED Spotlight**

- ◆ Clear Lens
- ◆ GU10 Base
- ◆ Warm white or daylight
- ◆ CRI: ≥80Ra
- ◆ Luminous flux :  
560lm (Daylight)  
480lm (Warm white)
- ◆ Dimensions: 50mm x 75mm
- ◆ Non dimmable

**AKESI GU10/COB-12W**60°  
Beam  
Angle

GU10

3000K  
6000KDim/  
Non-Dim**GU10/12W LED Spotlight**

- ◆ Clear Lens
- ◆ GU10 Base
- ◆ Warm white or daylight
- ◆ CRI: ≥80Ra
- ◆ Luminous flux :  
760lm (Daylight)  
700lm (Warm white)
- ◆ Dimensions: 50mm x 96mm
- ◆ Dimmable / Non dimmable



Featuring:

- ◆ Energy saving (≥80%) and long lifespan (≥20000hrs)
- ◆ No mercury or other toxic material
- ◆ No UV or infrared radiation
- ◆ Less heat; easy installation
- ◆ Full brightness at switch-on



## AKESI F-6C

### 6W LED Frost Glass Globe

- ◆ E27, B22
- ◆ Warm white or daylight
- ◆ CRI: ≥80Ra
- ◆ Luminous flux : 450lm - 500lm
- ◆ Dimensions: 44mm x 95mm
- ◆ Non dimmable

E27  
B22

3000K  
6000K

260°  
Beam  
Angle

Frost  
Diffuser



## AKESI F-3GLS

### 3.5W LED Frost Globe

- ◆ Frost Diffuser
- ◆ E27, B22
- ◆ CRI: ≥80Ra
- ◆ Luminous flux :  
300lm (Daylight)  
240lm (Warm white)
- ◆ Dimensions: 42mm x 80mm
- ◆ Non dimmable

E27  
B22

3000K  
6000K

260°  
Beam  
Angle

Frost  
Diffuser

## AKESI F-5GLS

### 5W LED Frost Globe

- ◆ Frost Diffuser
- ◆ E27, B22
- ◆ CRI: ≥80Ra
- ◆ Luminous flux :  
420lm (Daylight)  
350lm (Warm white)
- ◆ Dimensions: 42mm x 80mm
- ◆ Non dimmable



## AKESI F-7GLS

### 7W LED Frost Globe

- ◆ Frost Diffuser
- ◆ E27, B22
- ◆ Warm white or daylight
- ◆ CRI: ≥80Ra
- ◆ Luminous flux :  
620lm (Daylight)  
500lm (Warm white)
- ◆ Dimensions: 60mm x 118mm
- ◆ Non dimmable

E27  
B22

3000K  
6000K

260°  
Beam  
Angle

Frost  
Diffuser

## AKESI F-9GLS

### 9W LED Frost Globe

- ◆ Frost Diffuser
- ◆ E27, B22
- ◆ Warm white or daylight
- ◆ CRI: ≥80Ra
- ◆ Luminous flux :  
780lm (Daylight)  
640lm (Warm white)
- ◆ Dimensions: 60mm x 118mm
- ◆ Non dimmable

## AKESI F-11GLS

### 11W LED Frost Globe

- ◆ Frost Diffuser
- ◆ E27, B22
- ◆ Warm white or daylight
- ◆ CRI: ≥80Ra
- ◆ Luminous flux :  
1000lm (Daylight)  
800lm (Warm white)
- ◆ Dimensions: 60mm x 118mm
- ◆ Dimmable / Non dimmable



- ◆ Energy saving (≥80%) and long lifespan (≥20000hrs)
- ◆ No mercury or other toxic material; No UV or infrared radiation
- ◆ Less heat ; easy installation
- ◆ Full brightness at switch-on
- ◆ Beam angle 300° - 360°



## 3W LED Crystal Candle

**AKESI C-3C**

Φ35mm x H122mm

- ◆ E14 or B15
- ◆ Warm White or Daylight
- ◆ Luminous flux : 250-280lm
- ◆ 50/60Hz; CRI : ≥80Ra
- ◆ Non dimmable

E14  
B15

3000K  
6000K



## 4W LED Crystal Candle

**AKESI C-4C**

Φ37mm x H106mm

- ◆ E27 or B22
- ◆ Warm White or Daylight
- ◆ Luminous flux : 300-350lm
- ◆ 50/60Hz; CRI : ≥80Ra
- ◆ Non dimmable

E27  
B22

3000K  
6000K

## 3W LED Crystal Flame Candle

**AKESI C-3F**

- ◆ E14 or B15
- ◆ Warm White or Daylight
- ◆ Luminous flux : 250-300lm
- ◆ 50Hz; CRI : ≥80Ra
- ◆ Non dimmable

E27  
B22

3000K  
6000K

Warm White 3000K

Daylight 6000K



Φ35mm x H138mm



Φ37mm x H130mm



## Features:

- ♦ Wide LED beam angle 90°
- ♦ Dimmable LED driver included
- ♦ Flex & plug included
- ♦ Compatible with Clipsal Universal, Trailing Edge dimmers

White

Satin  
Chrome


3000K

4000K

6000K


## LED-DL9012

- ♦ 90mm Cutout
- ♦ 12W LED
- ♦ Power Factor :  $\geq 0.9$
- ♦ CRI: 3000K : 82 / 4000K : 80 / 6000K : 75
- ♦ Luminous flux :  
3000K : 800LM / 4000K : 840LM / 6000K : 920LM

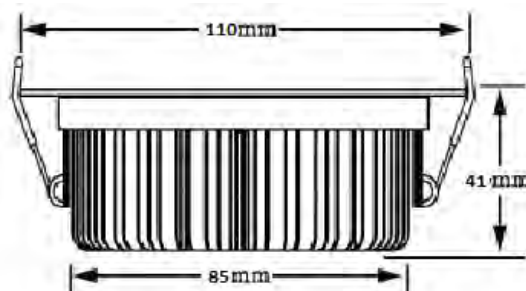


## LED-DL7010

- ♦ 70mm Cutout
- ♦ 10W LED
- ♦ Power Factor :  $\geq 0.9$
- ♦ CRI : 3000K : 82 / 4000K : 80 / 6000K : 75
- ♦ Luminous flux :  
3000K: 540LM / 4000K: 580LM / 6000K: 620LM

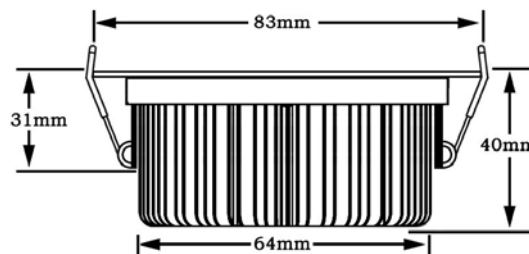

## Technical Parameters

Model No.	LED-T10-10W	LED-T10-20W
Product Size	L590mmxT10	L1118.5mmxT10
Input Voltage(V)	100~240v 50~60hz	
Power Factor	≥90%	
Conversion Efficiency	≥85%	
Insulation Resistance	≥50MΩ	
Lamp Power	10W	20W
Light Angle	≥120°	>120°
Intensity of Illumination	490lux/1m	260lux/1m
Luminous Flux	≥800lm	>1600lm
Ambient Temperature	-10~50°C	
Ambient Humidity	65%	
LED Quantity	156 LEDs	312 LEDs
Colour Temperature	2700k-4500k-6400k	
Lifespan	>30,000 hours	



Model No.	Emitting color	Voltage(V)	Des(mm)	LED QTY.	Wave-length	Power	Angle	Current	Package
STRIP-5050R-60	Red	DC12V	1000x8x0.22	60	620-630	≤14.4	120°C	0.6	5m/reel
STRIP-5050G-60	Green	DC12V	1000x8x0.22	60	520-525	≤14.4	120°C	0.6	5m/reel
STRIP-5050B-60	Blue	DC12V	1000x8x0.22	60	465-470	≤14.4	120°C	0.6	5m/reel
STRIP-5050W-60	White	DC12V	1000x8x0.22	60	5500-6500k	≤14.4	120°C	0.6	5m/reel
STRIP-5050WW-60	Warm/white	DC12V	1000x8x0.22	60	5500-3500k	≤14.4	120°C	0.6	5m/reel



## LED-DLSMD-6W



Power	6W
LED Quantity	27 LEDs
Luminous Flux	110Lm/W
Power Factor	≥0.94
Color Temperature	2700K,4100K,6400K
Lifespan	>30,000 hours
Input Voltage	240V
Operating Temperature	-20~+45°C
Dimension	Ø 111x70mm
Cutout	Ø 85mm
Frame Colour	White,Satin Chrome

## LED-DLSMD-9W



Power	9W
LED Quantity	45 LEDs
Luminous Flux	110Lm/W
Power Factor	≥0.94
Color Temperature	2700K,4100K,6400K
Lifespan	>30,000 hours
Input Voltage	240V
Operating Temperature	-20~+45°C
Dimension	Ø 140x90mm
Cutout	Ø 110mm
Frame Colour	White,Satin Chrome

## LED-DLSMD-16W




Power	16W
LED Quantity	80 LEDs
Luminous Flux	110Lm/W
Power Factor	≥0.94
Color Temperature	2700K,4100K,6400K
Lifespan	>30,000 hours
Input Voltage	240V
Operating Temperature	-20~+45°C
Dimension	Ø 178x70mm
Cutout	Ø 150mm
Frame Colour	White,Satin Chrome

## LED-DLSMD-22W




Power	22W
LED Quantity	108 LEDs
Luminous Flux	110Lm/W
Power Factor	≥0.94
Color Temperature	2700K,4100K,6400K
Lifespan	>30,000 hours
Input Voltage	240V
Operating Temperature	-20~+45°C
Dimension	Ø 192x95mm
Cutout	Ø 160mm
Frame Colour	White,Satin Chrome

## Mini SkyRock 10W

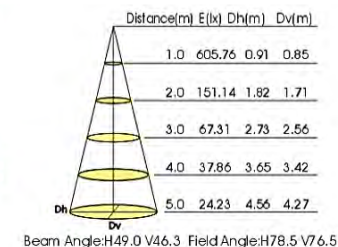


Lumen Output : 550Lm(5000K)  
510Lm(3000K)

CRI:83  
Non Dimmable  
Input: AC 240V 50/60Hz

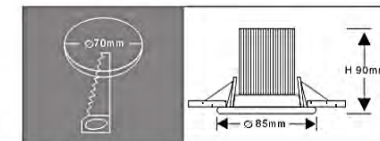


Frame Colour:White,Satin Chrome  
LED Colour:Warm White,Daylight

## Small SkyRock 12W

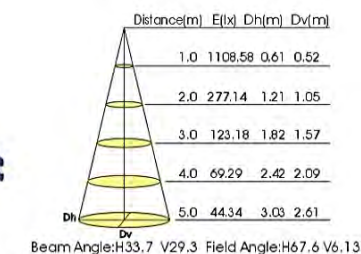


Lumen Output : 850 Lm(5000K)  
780Lm(3000K)

CRI:83  
Dimmable  
Input: AC 240V 50/60Hz

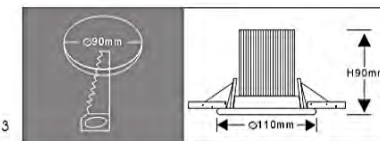


Frame Colour:White,Satin Chrome  
LED Colour:Warm White,Daylight

## SkyRock 18W

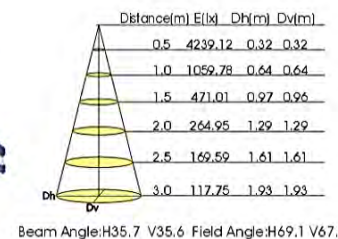

Lumen Output : 910 Lm(5000K)  
865Lm(3000K)

CRI:85  
Dimmable  
Input: AC 240V 50/60Hz

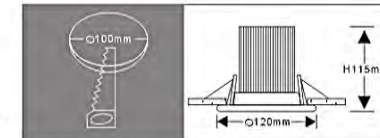

Frame Colour:White,Satin Chrome  
LED Colour:Warm White,Daylight




Adaptor Plate  
Ø200mm  
Colour:White,Satin Chrome

## LED Downlight Kit

LED-A3/5W/3000K  
LED-A3/5W/5000K




Frame Colour: White, Satin Chrome  
Lumen Output : 400 Lm(5000K)  
370 Lm(3000K)  
Input: AC 240V 50/60Hz

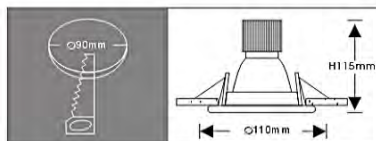

LED-A4/8W/3000K  
LED-A4/8W/5000K



Frame Colour: White, Satin Chrome  
Lumen Output : 550 Lm(5000K)  
520 Lm(3000K)  
Input: AC 240V 50/60Hz

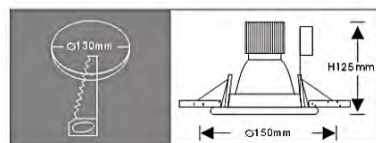


## LED Downlight Kit

LED-GU10/DL-90/SCH



LED-GU10/DL-90/WH

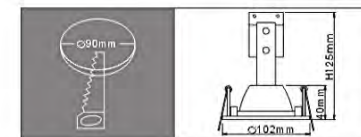


LED-LM-88MR16 White



LED-LM-95FD


Cutout: 95mm Ø  
Front: 110mm Ø






## LED Downlight Kit


LED-GU10/DL-70/WH

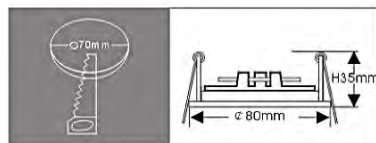


LED-GU10/DL-70/SCH

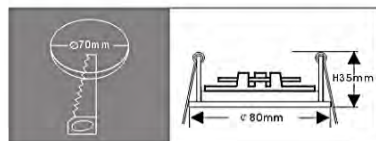

LED-GU10/DL-70-SQ/WH


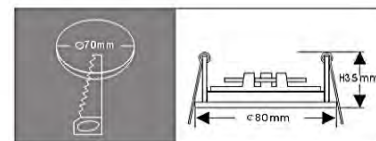


LED-GU10/DL-70-SQ/SCH

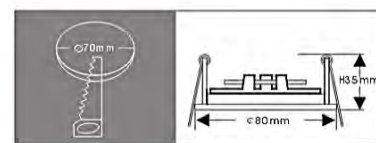



## LED Lamp

GU10/ LED 3W

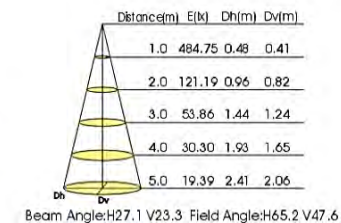



Lumen Output :300Lm(Daylight)  
260Lm(Warm White)  
GU10 Base, Non Dimmable  
Input: AC 240V 50/60Hz

GU10/ LED 5W

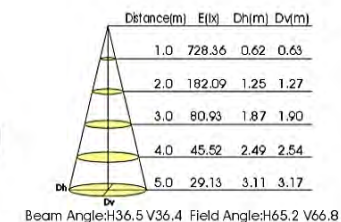

Lumen Output : 450 Lm(Daylight)  
420 Lm(Warm White)  
GU10 Base, Non Dimmable  
Input: AC 240V 50/60Hz

GU10/ LED 10W


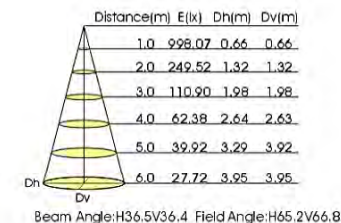


Lumen Output :600Lm(Daylight)  
580Lm(Warm White)  
GU10 Base, Non Dimmable  
Dimmable  
Input: AC 240V 50/60Hz





## LED Lamp

### MR16/ LED 3W

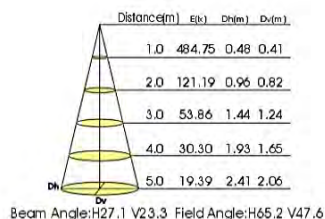



Lumen Output :300Lm(Daylight)  
260Lm(Warm White)  
G5.3 Base, Non Dimmable  
Input: DC 12V

### MR16/ LED 5W

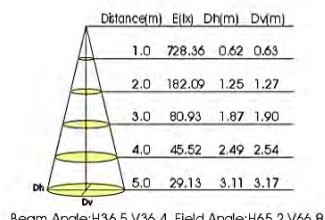



Lumen Output : 450 Lm(Daylight)  
420 Lm(Warm White)  
G5.3 Base, Non Dimmable  
Input: DC 12V

### MR16/ LED 10W

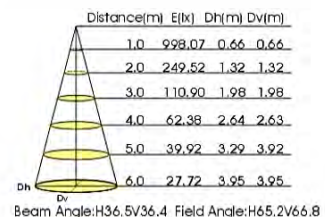

Lumen Output :600Lm(Daylight)  
580Lm(Warm White)  
G5.3 Base, Non Dimmable  
Input: DC 12V

### MR16/ COB 10W With LED Driver

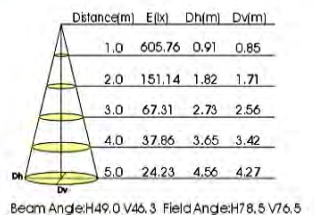

Lumen Output : 550 Lm(Daylight)  
510 Lm(Warm White)  
With LED Driver, Non Dimmable  
Input: DC 12V

## LED Driver

### Constant Voltage Driver 12W



Power Out : 12W  
Input: AC220- 240V 50/60Hz 120mA  
Output: 12VDC 1A  
Not Dimmable  
Suitable For Used For Operation  
With LED Modules Only

### Constant Current Driver 15W



Power Out : 3-15W  
Input:AC220- 240V 50/60Hz 120mA  
Output: Max 26VDC 650mA  
Not Dimmable  
Suitable For Used For Operation  
With LED Modules Only

### Constant Current Driver 20W



Powerout : 20W  
Input:AC220- 240V 50/60Hz  
Output:15-27VDC 720mA  
Dimming Range:10-100%

### Constant Current Driver 30W



Power Out : 30W  
Input:AC220- 240V 50/60Hz  
Output:40VDC 720mA  
Dimming Range:10-100%



**RoHS**

## LED Recessed



### DESCRIPTION

Stainless Steel Cover, Opal PC Diffuser  
With Plastic Housing & Fixing-spring Clips

### SMALL SQUARE: 9LEDs




LED-B02



LED-B03



LED-B04




240V



12V

IP54



S.S.  
COVER

ALUM.  
BODY

### LARGE SQUARE: 16LEDs




LED-B02B



LED-B03B



LED-B04B



### SMALL RECTANGULAR: 12LEDs



LED-A03




LED-A04



LED-A05



LED-A06



### LARGE RECTANGULAR: 16LEDs



LED-A03B




LED-A04B



LED-A05B



LED-A06B



## LED Recessed

### LED- J03

15LEDs  
W90xL230xH55mm

### DESCRIPTION


With Plastic Housing &  
Fixing-spring Clips;  
Aluminum Cover & Aluminum Body;




240V




12V



IP54



IP54



### LED- J03A

12LEDs  
W90xL135xH55mm

### DESCRIPTION


With Plastic Housing &  
Fixing-spring Clips;  
Aluminum Cover & Aluminum Body;




240V




12V



IP54



IP54





## LED Surface Mount

LED-R01



LED-R02




LED-R03



### DESCRIPTION

15LED	WHITE LED	240V	BLUE LED
ALU-MINIUM	RED LED	IP54	F

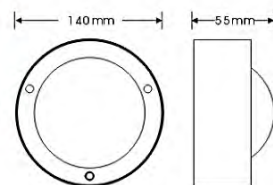


## LED Deck Light

LED-HH01 (6LEDs)

Frost Glass Diffuser  
Fixing-spring Clips  
Can Be Used In Ground, Floor,  
Wall, Ceiling, & Bathroom



IP67 (II)	316 SS COVER	ALUM, BODY	240V / 12V
WHITE LED	BLUE LED	F	



LED-101

Ideal Use in Deck, Staircase, Cabinet, etc.

Frost Glass Diffuser  
Fixing-spring Clips  
Can Be Used In Ground, Floor,  
Wall, Ceiling, & Bathroom



WHITE LED	BLUE LED	RED LED	GREEN LED
0.6W	240V / 12V	IP65	F

Cover: Aluminum or 316 S. Steel 25mmØ  
Cut-out: 21.5mmØ  
Depth: 25mm(12v) / 30mm(240v)

## LED Inground

LED-3731A




LED-3731B



### DESCRIPTION

15LED	WHITE LED		
240V	12V	BLUE LED	
316 S.S COVER	ALUM. BODY	IP65	F



## Energy Efficient

### T2 Spiral Energy Saving Tube

2700K  
Warm W.

4100K  
Cool W.

6400K  
Daylight

T2-25W / 2700K	T2-20W / 2700K	T2-15W / 2700K	T2-11W / 2700K	T2-9W / 2700K
T2-25W / 4100K	T2-20W / 4100K	T2-15W / 4100K	T2-11W / 4100K	T2-9W / 4100K
T2-25W / 6400K	T2-20W / 6400K	T2-15W / 4100K	T2-11W / 4100K	T2-9W / 6400K

**25W**  
B22, E27

**20W**  
B22, E27

**15W**  
B15, B22,  
E14, E27

**11W**  
B22, E27

**9W**  
B15, E14



T2-25W-B22



T2-20W-B22



T2-15W-B15  
T2-15W-B22



T2-11W-B22



T2-9W-B15



T2-25W-E27



T2-20W-E27



T2-15W-E14  
T2-15W-E27



T2-11W-E27




T2-9W-E14



T2-15W/2700K  
T2-15W/4100K  
T2-15W/6400K

15w T2 Spiral Energy Saving Tube Included:  
Warm White, Daylight or Cool White

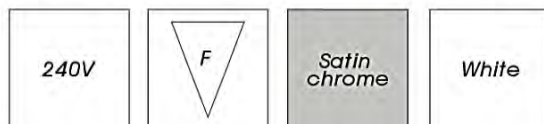

Energy Efficient Downlight

**LM-70FD**

70FD:70mm Cutout/ 85mm  $\varnothing$  Cover




**LM-90FD**

90FD:90mm Cutout/ 100mm  $\varnothing$  Cover



**LM-7090FD**

Cutout:70mm-90mm  $\varnothing$   
Front Cover: 100mm  $\varnothing$



Energy Efficient Downlight With Frost Glass Cover  
Fits Both 70mm & 90mm Cutout



T2-15W/2700K  
T2-15W/4100K  
T2-15W/6400K

15w T2 Spiral Energy Saving Tube Included:  
Warm White, Daylight or Cool White



Energy Efficient Downlight

**LM-70FD/SQ**

70FD:70mm Cutout/ 85x85mm Cover




**LM-90FD/SQ**

90FD:90mm Cutout/ 100x100mm Cover



**LM-7090FD/SQ**

Cutout:70mm-90mm  $\varnothing$   
Front Cover: 100X100mm  $\varnothing$




Energy Efficient Downlight With Frost Glass Cover  
Fits Both 70mm & 90mm Cutout





GU10-13W / 2700k  
GU10-13W / 4100k  
GU10-13W / 6400k

13W GU10 Energy Saving Tube  
Included: Warm White, Daylight  
or Cool White

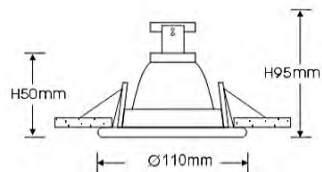


CFL-LM-95FD


Cutout: 95mm Ø  
Front: 110mm Ø



CFL-GU10/DL-70/SCH

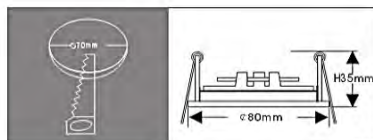

CFL-GU10/DL-90/SCH

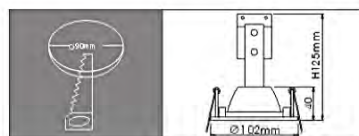

LM-2024

200mm Ø  
2x24w Daylight



LM-1015

150mm Ø  
1x15w Daylight



LM-1008

110mm Ø  
1x15w Daylight



Compact Fluorescent Light  
Energy Saving Tube Included: Daylight





## LM-1040

T5 Acrylic Oyster  
1x40w



## LM-1032



T5 Acrylic Oyster:  
1x32w



T5 Energy Saving Tube  
Included: Daylight

## LM-1022

T5 Acrylic Oyster:  
1x22w



## LM-3055

T5 Acrylic Oyster  
1x55w / 410mm Ø





## LM-3032

T5 Acrylic Oyster  
1x32w / 330mm Ø





T5 Energy Saving Tube  
Included  
Wam White or Daylight



## AC-035 / T5

T5-Spike Oyster:  
AC-035/ T5 / 30:1x22W  
AC-045 / T5/ 40:1x32W






## AC-045 / T5

T5-Alabaster:  
AC-045 / T5 / 30:1x22w  
AC-045 / T5 / 40:1x32w



## Alabaster



## AC-025

T5-AC-025  
Chrome Oyster:  
AC-025/ T5 /30:1x22W  
AC-025/ T5 /40:1x40W



Satin  
Chrome

Frost  
Glass

F

## LM-098 / T5

T5-LM-098 Oyster:  
LM-098/T5/ 30:1x22W  
LM-098/T5/ 40:1x40W



Satin  
Chrome

Frost  
Glass

F

## LM-108 / T5

T5-LM-108 Oyster:  
LM-108/T5/ 40W  
LM-108/T5/ 62W



Frost  
Glass

F

## AC-045

E27 Alabaster:  
AC-045 / 30:1x75W  
AC-045 / 40:2x60W



## AC-045 / WB

Alabaster Wall Light:  
1x75W(E27)



Alabaster

S.Chr.  
(Clips)

Gold  
(Clips)

Alabaster

F

## AC-035

E27 Spike Oyster:  
AC-035/30:1x75W  
AC-035/40:2x60W



## AC-035 / WB

Spike Wall Light:  
1x75W(E27)



Satin  
Chrome

Frost  
Glass

F

## Oyster

### AC-025 / WB

AC-025  
Satin Chrome  
Wall Light:  
1x75W(E27)



### AC-025

(E27) AC-025  
Satin Chrome Oyster:  
AC-025/ 30:1x75W  
AC-025/ 40:2x60W




### LM-098

(E27) LM-098 Oysters:  
LM-098/ 30:1x75W  
LM-098/ 40:2x60W



Satin  
Chrome

Frost  
Glass



## Square Oyster

### LM-018/30SCH LM-018/40SCH

Satin Chrome Oyster:  
Frost Front Glass  
Satin Chrome Trim



### LM-018/30G LM-018/40G

Frost Glass Oyster:  
Frost Front Glass  
Frost Glass Trim



### LM-018/30GC LM-018/40GC

Clear Glass Oyster:  
Frost Front Glass  
Clear Glass Trim




### Square Curve Oyster

30cm:  
1x75w

40cm:  
2x60w

E27




### LM-016

Glass Square Oyster (E27)  
30cm:1x75W  
40cm:2x60W

Frost Front Glass  
Clear Glass Trim

E27



Glass Square Oyster

## Square Oyster


LM-019

Silver Square Oyster(E27)  
30cm:1x75w  
40cm:2x60w



LM-019/WB

Silver Square Wall Light:  
30cm:1x75w(E27)



Frost Front Glass  
Satin Chrome Trim

AC-035/SQ

E27 Square Spike Oyster:  
AC-035/SQ/30:1x75w  
AC-035/SQ/40:2x60w



AC-035/SQ/WB

Square Spike Wall Light:  
1x75w(E27)




## Ceiling Pendant

SIM/40/PDT  
SIM/50/PDT (Pendant)



SIM/40/CTC  
(Close To Ceiling)

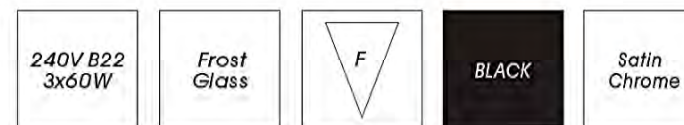



## Ceiling Pendant

KEN/5LT

KEN/3LT



KEN/1LT



240V B22

Alabaster  
Glass

F

Antique  
Brass

Matt  
Brass

Satin  
Chrome

Length  
Adjust-  
ment




## Bunker

LM-301

DESCRIPTION  
Aluminum Die-casting  
Temper Frost PC Lense  
240V E27 Max 60w  
Ø 280mm, H105mm





IP54






LM-201  
LM-202

DESCRIPTION  
Aluminum Die-casting  
Temper Clear Glass Lense  
240V E27  
PAR30 75w




IP54




LM-0731




ALUMINUM UP & DOWN  
Temper Glass Lenses  
240V E27 100W




SILVER



IP65



BLACK




LM-816



LM-817




LM-818




## DESCRIPTION


240V Gu10 Max 35w  
Energy-saving GU 10 Friendly



304  
S.Steel



IP44




F



## AC-105

**DESCRIPTION**  
Aluminum Die-casting  
Temper Glass Diffuser  
12V G4 Max 20w

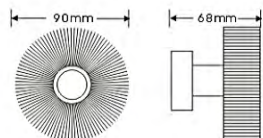

Matching 12V Transformer  
Available.


IP54

SILVER




## AC-8801 AC-8802

**DESCRIPTION**  
Aluminum Die-casting  
240V E27 Max 11w



SILVER


BLACK



IP44

## 2001

**DESCRIPTION**  
Aluminum Die-casting  
Frost Glass/Opal PC Diffuser

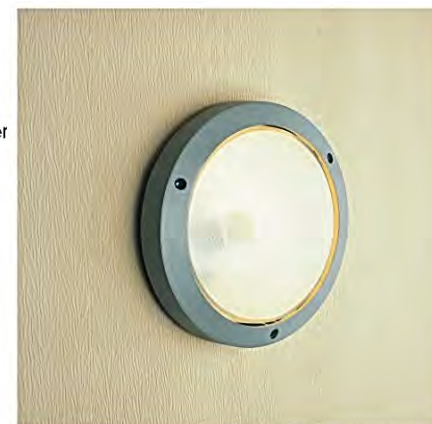

## 2002





## 2003



E27/240v

IP54




BLACK

SILVER


WHITE

## 1605



E27/240v

IP54



BEIGE

SILVER

BLACK




## ***Bulkhead***

5001 / 5001S




5002 / 5002S



5003 / 5003S

### DESCRIPTION

Aluminum Die-casting  
Frost Glass Diffuser  
240V E27 Max 100W(L) / 60W(S)




## ***Bulkhead***

5004 / 5004S





5005 / 5005S



5006 / 5006S

### DESCRIPTION


Aluminum Die-casting  
Frost Glass Diffuser  
240V E27 Max 100W(L) / 60W(S)

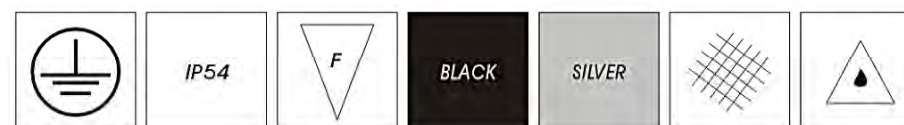



## Brick Light

1501

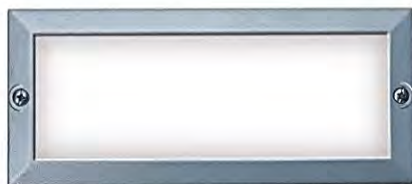


1502



1503

### BRICK LIGHT DESCRIPTION

Mounting Box Available For  
Separate Sale



IP54

E27/240v

F

BLACK

SILVER

## Bulkhead

1801



1802




1802



### DESCRIPTION

Aluminum Die-casting  
Frost Glass Diffuser  
240V E27 Max 60W



2004



2005




2006






### DESCRIPTION

Aluminum Die-casting  
Frost Glass Diffuser  
240V E27 Max 100W

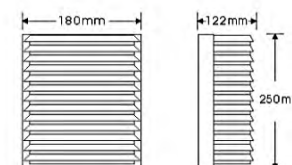

IP44



BEIGE

BLACK


SILVER

## **Bollard / Post**


**3801**

### DESCRIPTION


Aluminum Die-casting  
Glass / PC Diffuser  
240V E27 Max 100W




**3615**



**3604**



**3620/800 3620/400**



## **Accessory**

Adaptor Plate

Cutout: Ø100mm - 190mm

Front Size: Ø200mm

White or Satin Chrome



Electronic T5 Ballast  
22W, 32W, 40W, 55W, 62W



Flexi Plug  
2 Pin/3 Pin  
1.2m Lead



Gu10 Lampholder



# INDEX

## **LED**

LED TUBE, STRIP.....	1
LED DOWNLIGHT KIT.....	2-6
LED LAMP.....	7-8
LED DRIVER.....	9
LED RECESSED.....	10-11
LED SURFACE MOUNT.....	12
LED DECK / INGROUND.....	13-14

## **ENERGY EFFICIENT**

CFL LAMP.....	15
CFL DOWNLIGHT.....	16-19
CFL OYSTER.....	20-22

## **CEILING/INDOOR**

OYSTER.....	23-26
PENDANT.....	27-28

## **GARDEN/OUTDOOR**

BUNKER.....	29
EXTERIOR WALL LIGHT.....	30-32
BULKHEAD.....	33-37
BOLLARD/POST.....	38

## **ACCESSORY**

.....	39
-------	----